


## Plaingard G (closed)

# Model Plaingard G (closed), bronze aluminium

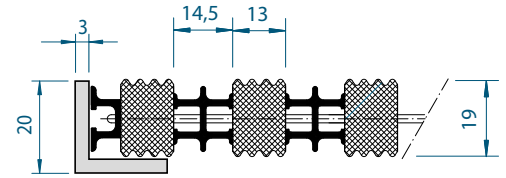

### Description

Plaingard is a weatherproof mat which is used where there are high levels of dirt, mud or snow. It is an extremely robust entrance mat due to its solid rubber wiper strips and aluminium scraper profiles.

### Colours



Black

<b>For mat heights in mm</b>	19
<b>Weight (kg/m<sup>2</sup>)</b>	18.5
<b>Accessibility</b>	Wheelchairs and hand trolleys
<b>Compressive wheel load</b>	Compressive wheel load: - area to DIN 1072 = 200 x 260 mm = 520 cm <sup>2</sup> . - conditions: full-surface mat coverage, appropriate substructure. 2,000 N : 520 cm <sup>2</sup> = 4 N/cm <sup>2</sup> , 10,000 N : 520 cm <sup>2</sup> = 19 N/cm <sup>2</sup> , 15,000 N : 520 cm <sup>2</sup> = 29 N/cm <sup>2</sup> , 20,000 N : 520 cm <sup>2</sup> = 38 N/cm <sup>2</sup> , 30,000 N : 520 cm <sup>2</sup> = 58 N/cm <sup>2</sup> , 40,000 N : 520 cm <sup>2</sup> = 77 N/cm <sup>2</sup> , 75,000 N : 520 cm <sup>2</sup> = 144 N/cm <sup>2</sup>
<b>Tread surface</b>	profiled, black solid rubber alternating with bronze-anodised aluminium scraper profile



Suitable for outdoor areas



Closed construction mat



Low moisture absorption



For high foot traffic



Moderate dirt uptake



Production time within three working days after technically clarified order. Subject to change without notice.



Load carrying capacity up to 30kN

Subject to technical modifications

Kafloor Mats GmbH · Johannes-Gutenberg-Platz 1 · 06773 Gräfenhainichen  
· Telephone: +49 34953 31455 · Telefax: +49 34953 31459 · eingangsmatten@kafloor.de · www.kafloor.de

KAFLOOR