
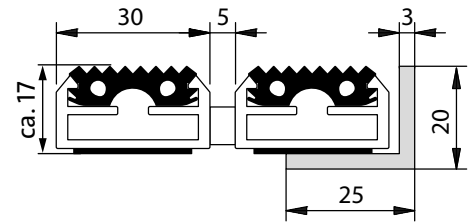


## Model Portagard AS, 17 mm

For extremely high levels of dirt and high foot traffic.

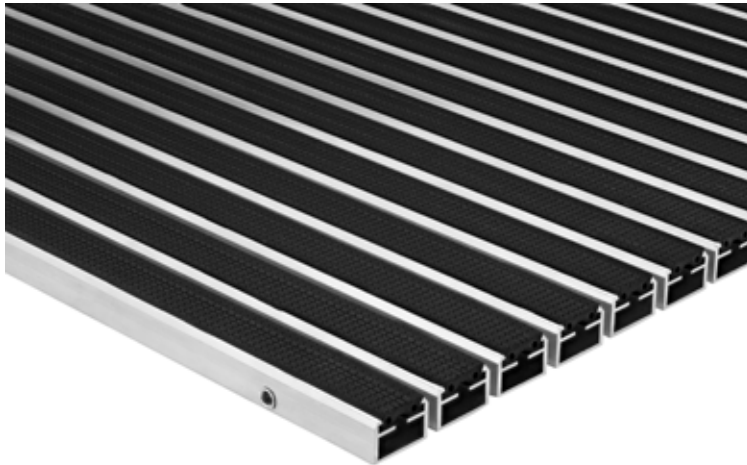

### Description

Portagard AS has a reinforced profile and is therefore also suitable for heavy loads.

### Colours



Black

<b>For mat heights in mm</b>	17
<b>Weight (kg/m<sup>2</sup>)</b>	15.96
<b>Profile spacing</b>	5 mm
<b>Accessibility</b>	heavy vehicles
<b>Compressive wheel load</b>	Compressive wheel load: - area to DIN 1072 = 200 x 260 mm = 520 cm <sup>2</sup> . - conditions: full-surface mat coverage, appropriate substructure. 2,000 N : 520 cm <sup>2</sup> = 4 N/cm <sup>2</sup> , 10,000 N : 520 cm <sup>2</sup> = 19 N/cm <sup>2</sup> , 15,000 N : 520 cm <sup>2</sup> = 29 N/cm <sup>2</sup> , 20,000 N : 520 cm <sup>2</sup> = 38 N/cm <sup>2</sup> , 30,000 N : 520 cm <sup>2</sup> = 58 N/cm <sup>2</sup> , 40,000 N : 520 cm <sup>2</sup> = 77 N/cm <sup>2</sup> , 75,000 N : 520 cm <sup>2</sup> = 144 N/cm <sup>2</sup>
<b>Tread surface</b>	replaceable, robust, weather-proof and profiled rubber inserts alternating with 5 mm spacers
<b>Support chassis</b>	reinforced aluminium support chassis with integral micro-scraper bar and sound insulation underlay



Suitable for outdoor areas



Open mat construction



Slip resistance R9



Low moisture absorption



For high foot traffic



Moderate dirt uptake



Rollable mat



3 years guarantee



Load carrying capacity up to 40kN

Subject to technical modifications