
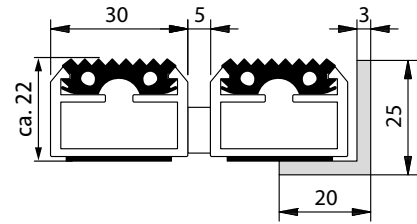


Portagard AS

Model Portagard AS, 22 mm

For extremely high levels of dirt and high foot traffic.

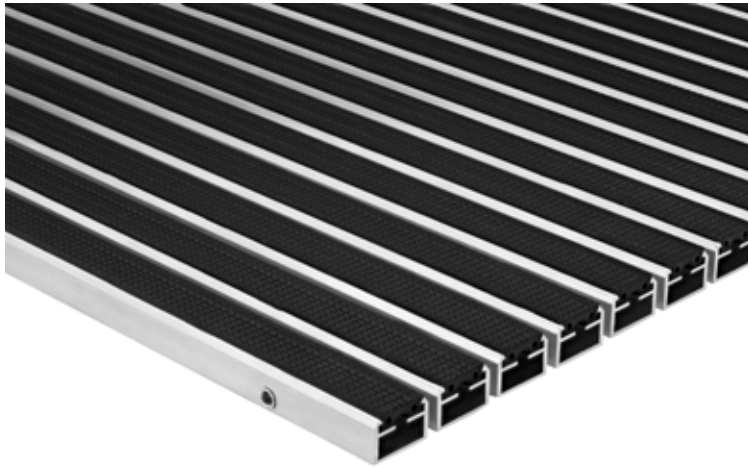

Description

Portagard AS has a reinforced profile and is therefore also suitable for heavy loads.

Colours



Black

For mat heights in mm	22
Weight (kg/m²)	18.8
Profile spacing	5 mm
Accessibility	heavy vehicles
Compressive wheel load	Compressive wheel load: - area to DIN 1072 = 200 x 260 mm = 520 cm ² . - conditions: full-surface mat coverage, appropriate substructure. 2,000 N : 520 cm ² = 4 N/cm ² , 10,000 N : 520 cm ² = 19 N/cm ² , 15,000 N : 520 cm ² = 29 N/cm ² , 20,000 N : 520 cm ² = 38 N/cm ² , 30,000 N : 520 cm ² = 58 N/cm ² , 40,000 N : 520 cm ² = 77 N/cm ² , 75,000 N : 520 cm ² = 144 N/cm ²
Tread surface	replaceable, robust, weather-proof and profiled rubber inserts alternating with 5 mm spacers
Support chassis	reinforced aluminium support chassis with integral micro-scraper bar and sound insulation underlay



Suitable for outdoor areas



Open mat construction



Slip resistance R9



Low moisture absorption



For high foot traffic



Moderate dirt uptake



Rollable mat



3 years guarantee



Load carrying capacity up to 40kN

Subject to technical modifications

Kafloor Mats GmbH · Johannes-Gutenberg-Platz 1 · 06773 Gräfenhainichen
 · Telephone: +49 34953 31455 · Telefax: +49 34953 31459 · eingangsmatten@kafloor.de · www.kafloor.de