


## Model Portagard DB, 22 mm

For extremely high levels of dirt and high foot traffic.

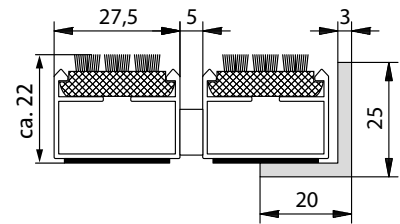

### Description

With its triple brush strips, Portagard DB is always used in areas with particularly high levels of dirt and coarse dirt.



### Colours



Triple brush black



Triple brush grey

|                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>For mat heights in mm</b>     | 22                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Weight (kg/m<sup>2</sup>)</b> | 15.47                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Profile spacing</b>           | 5 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <b>Accessibility</b>             | Wheelchairs and hand trolleys                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Compressive wheel load</b>    | Compressive wheel load: - area to DIN 1072 = 200 x 260 mm = 520 cm <sup>2</sup> . - conditions: full-surface mat coverage, appropriate substructure. 2,000 N : 520 cm <sup>2</sup> = 4 N/cm <sup>2</sup> , 10,000 N : 520 cm <sup>2</sup> = 19 N/cm <sup>2</sup> , 15,000 N : 520 cm <sup>2</sup> = 29 N/cm <sup>2</sup> , 20,000 N : 520 cm <sup>2</sup> = 38 N/cm <sup>2</sup> , 30,000 N : 520 cm <sup>2</sup> = 58 N/cm <sup>2</sup> , 40,000 N : 520 cm <sup>2</sup> = 77 N/cm <sup>2</sup> , 50,000 N : 520 cm <sup>2</sup> = 96 N/cm <sup>2</sup> , 60,000 N : 520 cm <sup>2</sup> = 115 N/cm <sup>2</sup> , 75,000 N : 520 cm <sup>2</sup> = 144 N/cm <sup>2</sup> |

Subject to technical modifications

Kafloor Mats GmbH · Johannes-Gutenberg-Platz 38 · D-49099 Bielefeld  
 Telephone: +49 34953 31455 · Telefax: +49 34953 31456  
 E-Mail: info@kafloor.de · www.kafloor.de



suitable for indoor areas



Suitable for covered outdoor areas



Suitable for outdoor areas



Open mat construction



Slip resistance R13



Low moisture absorption



For high foot traffic



Triple brushes



Rollable mat



3 years guarantee



Load carrying capacity up to 20kN