

Model Portagard IB, 22 mm

For extremely high levels of dirt and high foot traffic.



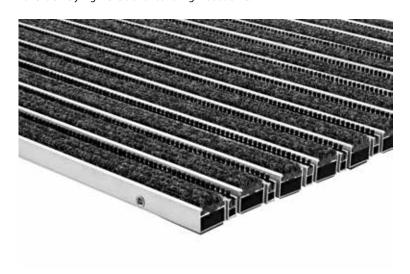



suitable for indoor areas



Suitable for covered outdoor areas



Open mat construction



High moisture absorption





For high foot traffic



Brush strips, single



Scraper bar



Rollable mat



3 years guarantee



Load carrying capacity up to 20kN



Due to its integral brush strips, Portagard IB can be used where there are excessive levels of dirt and moisture. Its ribbed carpet strips retain their robust performance even under high load.

Colours









rown A

Anthracit

li alaa a

For mat heights in mm	22
Weight (kg/m²)	11.86
Profile spacing	5 mm
Accessibility	Wheelchairs and hand trolleys
Compressive wheel load	Compressive wheel load: - area to DIN 1072 = 200 x 260 mm = 520 cm² conditions: full-surface mat coverage, appropriate substructure. 2,000 N:520 cm² = 4 N/cm², 10,000 N:520 cm² = 19 N/cm², 15,000 N:520 cm² = 29 N/cm², 20,000 N:520 cm² = 38 N/cm², 30,000 N:520 cm² = 58 N/cm², 40,000 N:520 cm² = 77 N/cm², 75,000 N:520 cm² = 144 N/cm²
Tread surface	Replaceable, robust, highly absorbent ribbed carpet strips alternating with 5 mm spacers and brush profiles
Support chassis	Aluminium support chassis with integral microscraper bar and sound insulation underlay