

Model Portagard IEB, 22 mm

For extremely high levels of dirt and high foot traffic.



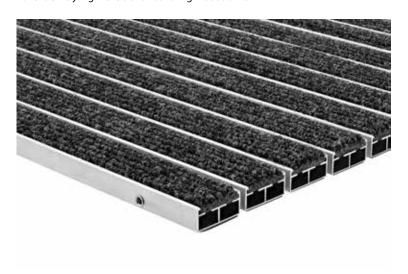



suitable for indoor areas



Suitable for covered outdoor areas



Open mat construction





High moisture absorption



For high foot traffic



Rollable mat



3 years guarantee



Load carrying capacity up to 20kN

Description

Due to their extra wide profiles, Portagard IEB and ISEB can collect extremely high levels of moisture and dirt and thus combine a high-quality appearance with high load capacity.

Colours







For mat heights in mm	22
Weight (kg/m²)	9.05
Profile spacing	5 mm
Accessibility	Wheelchairs and hand trolleys
Compressive wheel load	Compressive wheel load: - area to DIN 1072 = 200 x 260 mm = 520 cm² conditions: full-surface mat coverage, appropriate substructure. 2,000 N:520 cm² = 4 N/cm², 10,000 N:520 cm² = 19 N/cm², 15,000 N:520 cm² = 29 N/cm², 20,000 N:520 cm² = 38 N/cm², 30,000 N:520 cm² = 58 N/cm², 40,000 N:520 cm² = 77 N/cm², 75,000 N:520 cm² = 144 N/cm²
Tread surface	replaceable, robust, highly absorbent ribbed carpet strips
Support chassis	Aluminium support chassis with integral microscraper bar and sound insulation underlay