
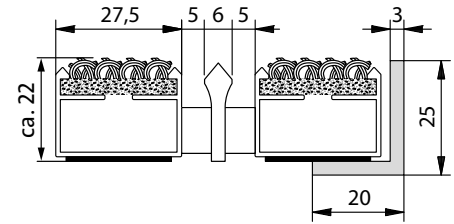


Portagard IK

Model Portagard IK, 22 mm

For extremely high levels of dirt and high foot traffic.

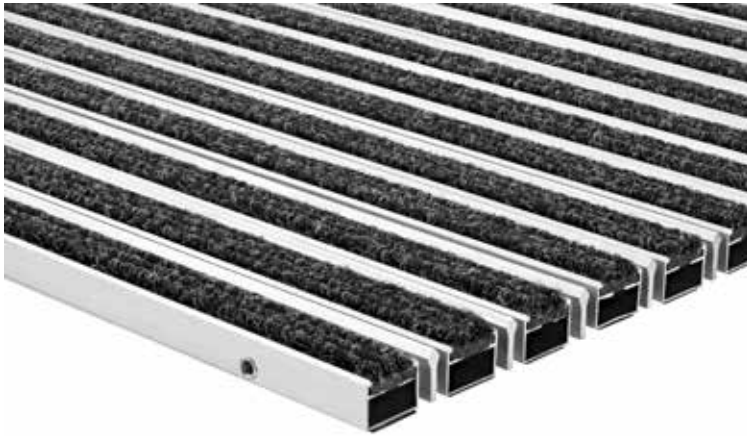

Description

The open-base roll-up mat for functionally demanding areas. Made from replaceable, robust ribbed carpet strips in an aluminium support chassis with additional aluminium scraper profile to collect coarse dirt.

Colours



Beige-brown



Anthracite



light grey

For mat heights in mm	22
Weight (kg/m²)	11.95
Profile spacing	5 mm
Accessibility	Wheelchairs and hand trolleys
Compressive wheel load	Compressive wheel load: - area to DIN 1072 = 200 x 260 mm = 520 cm ² . - conditions: full-surface mat coverage, appropriate substructure. 2,000 N : 520 cm ² = 4 N/cm ² , 10,000 N : 520 cm ² = 19 N/cm ² , 15,000 N : 520 cm ² = 29 N/cm ² , 20,000 N : 520 cm ² = 38 N/cm ² , 30,000 N : 520 cm ² = 58 N/cm ² , 40,000 N : 520 cm ² = 77 N/cm ² , 75,000 N : 520 cm ² = 144 N/cm ²
Tread surface	replaceable, robust, highly absorbent ribbed carpet strips
Support chassis	Aluminium support chassis with additional aluminium scraper bar and sound insulation underlay



suitable for indoor areas



Suitable for covered outdoor areas



Open mat construction



High moisture absorption



For high foot traffic



Moderate dirt uptake



Scraper bar



Rollable mat



3 years guarantee



Load carrying capacity up to 20kN