
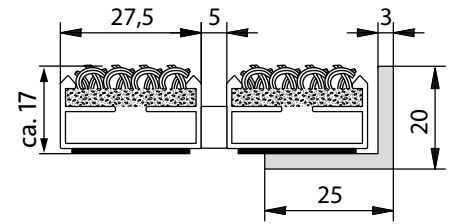


Portagard I

Model Portagard I, 17 mm

For extremely high levels of dirt and high foot traffic.

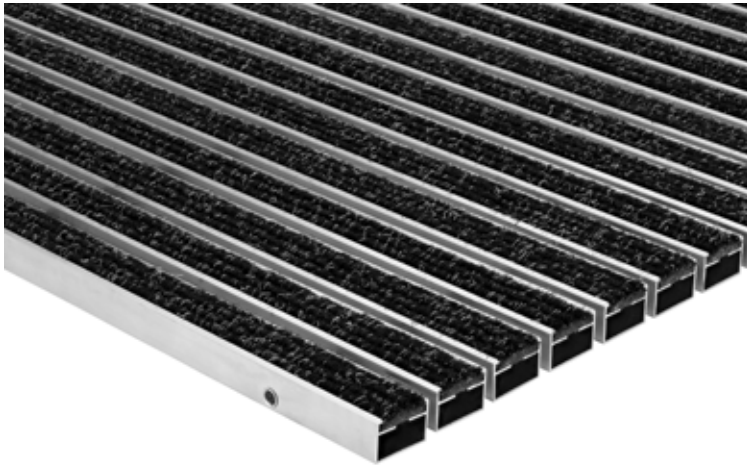

Description

The open construction-, roll-up mat for functionally demanding areas.



Colours



Beige-brown



Anthracite



light grey



suitable for indoor areas



Suitable for covered outdoor areas



Open mat construction



High moisture absorption



For high foot traffic



Moderate dirt uptake



Rollable mat



3 years guarantee



Load carrying capacity up to 20kN

For mat heights in mm	17
Weight (kg/m²)	8.42
Profile spacing	5 mm
Accessibility	Wheelchairs and hand trolleys
Compressive wheel load Subject to technical modifications	Compressive wheel load: - area to DIN 1072 = 200 x 260 mm = 520 cm ² . - conditions: full-surface mat coverage, appropriate substructure. 2,000 N : 520 cm ² = 4 N/cm ² , 10,000 N : 520 cm ² = 19 N/cm ² , 15,000 N : 520 cm ² = 29 N/cm ² , 20,000 N : 520 cm ² = 38 N/cm ² , 30,000 N : 520 cm ² = 58 N/cm ² , 40,000 N : 520 cm ² = 77 N/cm ² , 75,000 N : 520 cm ² = 144 N/cm ²

Kafloor Mats GmbH · Johannes-Gutenberg-Str. 11 · 49349 Varel · Tel. +49 34953 31455 · Fax +49 34953 31459 · eingangsmatten@kafloor.de · www.kafloor.de