
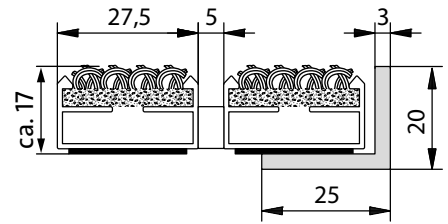


Portagard I

Model Portagard I, 17 mm

For extremely high levels of dirt and high foot traffic.

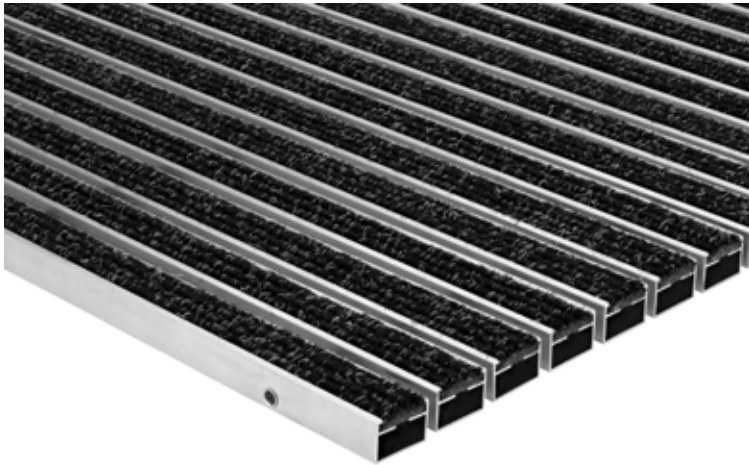

Description

The open construction-, roll-up mat for functionally demanding areas.



Colours



Beige-brown



Anthracite



light grey



suitable for indoor areas



Suitable for covered outdoor areas



Open mat construction



High moisture absorption



For high foot traffic



Moderate dirt uptake



Rollable mat



3 years guarantee



Load carrying capacity up to 20kN

Portagard I

Model Portagard I, 17 mm

For mat heights in mm	17
Weight (kg/m²)	8.42
Profile spacing	5 mm
Accessibility	Wheelchairs and hand trolleys
Compressive wheel load	<p>Compressive wheel load: - area to DIN 1072 = 200 x 260 mm = 520 cm².</p> <p>- conditions: full-surface mat coverage, appropriate substructure.</p> <p>2,000 N : 520 cm² = 4 N/cm², 10,000 N : 520 cm² = 19 N/cm², 15,000 N : 520 cm² = 29 N/cm², 20,000 N : 520 cm² = 38 N/cm², 30,000 N : 520 cm² = 58 N/cm², 40,000 N : 520 cm² = 77 N/cm², 75,000 N : 520 cm² = 144 N/cm²</p>
Tread surface	replaceable, robust, highly absorbent ribbed carpet strips
Support chassis	Aluminium support chassis with integral micro-scraper bar and sound insulation underlay