
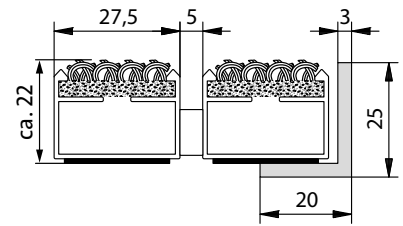


# Portagard I

## Model Portagard I, 22 mm

For extremely high levels of dirt and high foot traffic.

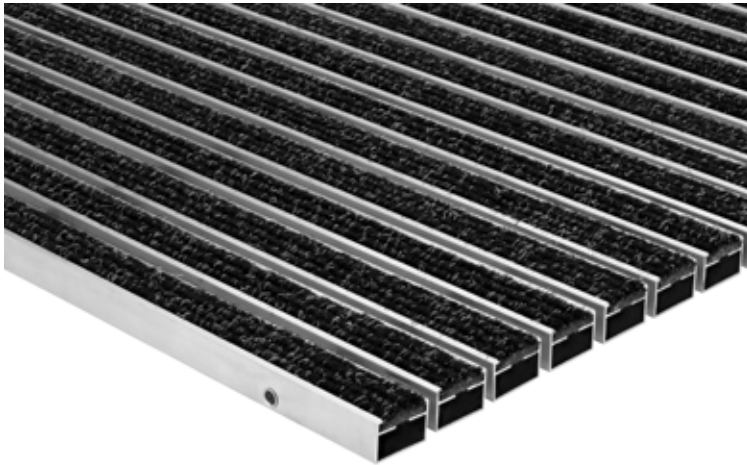

### Description

The open construction-, roll-up mat for functionally demanding areas.



### Colours



Beige-brown



Anthracite



light grey



suitable for indoor areas



Suitable for covered outdoor areas



Open mat construction



High moisture absorption



For high foot traffic



Moderate dirt uptake



Rollable mat



3 years guarantee



Load carrying capacity up to 20kN

# Portagard I

---

## Model Portagard I, 22 mm

<b>For mat heights in mm</b>	22
<b>Weight (kg/m<sup>2</sup>)</b>	9.42
<b>Profile spacing</b>	5 mm
<b>Accessibility</b>	Wheelchairs and hand trolleys
<b>Compressive wheel load</b>	<p>Compressive wheel load: - area to DIN 1072 = 200 x 260 mm = 520 cm<sup>2</sup>.</p> <p>- conditions: full-surface mat coverage, appropriate substructure.</p> <p>2,000 N : 520 cm<sup>2</sup> = 4 N/cm<sup>2</sup>, 10,000 N : 520 cm<sup>2</sup> = 19 N/cm<sup>2</sup>, 15,000 N : 520 cm<sup>2</sup> = 29 N/cm<sup>2</sup>, 20,000 N : 520 cm<sup>2</sup> = 38 N/cm<sup>2</sup>, 30,000 N : 520 cm<sup>2</sup> = 58 N/cm<sup>2</sup>, 40,000 N : 520 cm<sup>2</sup> = 77 N/cm<sup>2</sup>, 75,000 N : 520 cm<sup>2</sup> = 144 N/cm<sup>2</sup></p>
<b>Tread surface</b>	replaceable, robust, highly absorbent ribbed carpet strips
<b>Support chassis</b>	Aluminium support chassis with integral micro-scraper bar and sound insulation underlay