
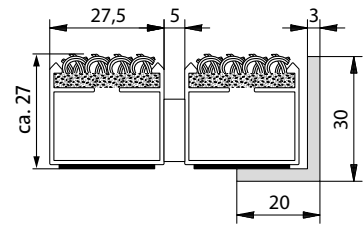


# Portagard I

## Model Portagard I, 27 mm

For extremely high levels of dirt and high foot traffic.

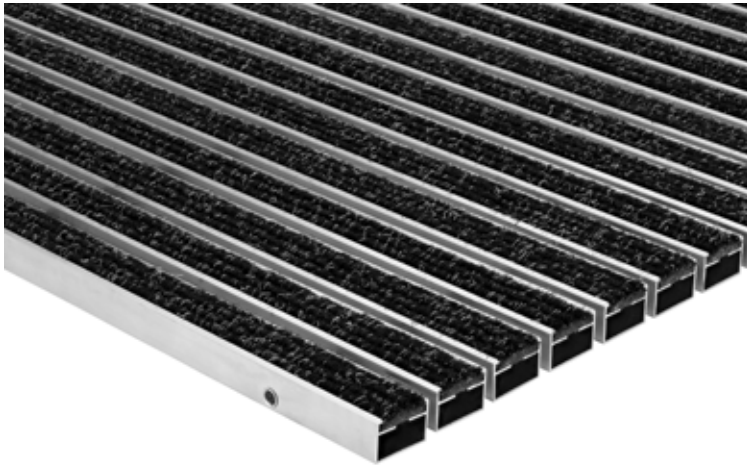

### Description

The open construction-, roll-up mat for functionally demanding areas.



### Colours



Beige-brown



Anthracite



light grey



suitable for indoor areas



Suitable for covered outdoor areas



Open mat construction



High moisture absorption



For high foot traffic



Moderate dirt uptake



Rollable mat



3 years guarantee



Load carrying capacity up to 20kN

<b>For mat heights in mm</b>	27
<b>Weight (kg/m<sup>2</sup>)</b>	10.44
<b>Profile spacing</b>	5 mm
<b>Accessibility</b>	Wheelchairs and hand trolleys
<b>Compressive wheel load</b> Subject to technical modifications	Compressive wheel load: - area to DIN 1072 = 200 x 260 mm = 520 cm <sup>2</sup> . - conditions: full-surface mat coverage, appropriate substructure. 2,000 N : 520 cm <sup>2</sup> = 4 N/cm <sup>2</sup> , 10,000 N : 520 cm <sup>2</sup> = 19 N/cm <sup>2</sup> , 15,000 N : 520 cm <sup>2</sup> = 29 N/cm <sup>2</sup> , 20,000 N : 520 cm <sup>2</sup> = 38 N/cm <sup>2</sup> , 30,000 N : 520 cm <sup>2</sup> = 58 N/cm <sup>2</sup> , 40,000 N : 520 cm <sup>2</sup> = 77 N/cm <sup>2</sup> , 50,000 N : 520 cm <sup>2</sup> = 96 N/cm <sup>2</sup> , 60,000 N : 520 cm <sup>2</sup> = 115 N/cm <sup>2</sup> , 75,000 N : 520 cm <sup>2</sup> = 144 N/cm <sup>2</sup>

Kafloor Mats GmbH · Johannes-Gutenberg-Str. 11 · 49349 Varel · Germany  
 Telephone: +49 34953 31455 · Telefax: +49 34953 31459 · eingangsmatten@kafloor.de · www.kafloor.de