


## Tuftigard G (closed)

# Model Tuftigard G (closed), gold aluminium

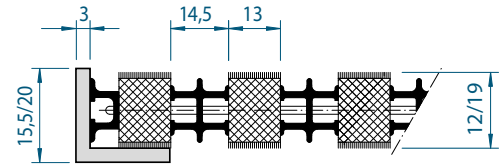

### Description

Tuftigard G is characterised by nylon-pile rubber wiper strips alternating with aluminium or brass scraper profiles. This mat can therefore be used as a specific design feature in entrance areas.

### Colours



grey



Zebra



black

|                                  |   |
|----------------------------------|---|
| <b>For mat heights in mm</b>     | 19  |
| <b>Weight (kg/m<sup>2</sup>)</b> | 17  |
| <b>Accessibility</b>             | heavy vehicles  |
| <b>Compressive wheel load</b>    | Compressive wheel load: - area to DIN 1072 = 200 x 260 mm = 520 cm <sup>2</sup> . - conditions: full-surface mat coverage, appropriate substructure. 2,000 N : 520 cm <sup>2</sup> = 4 N/cm <sup>2</sup> , 10,000 N : 520 cm <sup>2</sup> = 19 N/cm <sup>2</sup> , 15,000 N : 520 cm <sup>2</sup> = 29 N/cm <sup>2</sup> , 20,000 N : 520 cm <sup>2</sup> = 38 N/cm <sup>2</sup> , 30,000 N : 520 cm <sup>2</sup> = 58 N/cm <sup>2</sup> , 40,000 N : 520 cm <sup>2</sup> = 77 N/cm <sup>2</sup> , 75,000 N : 520 cm <sup>2</sup> = 144 N/cm <sup>2</sup> |
| <b>Tread surface</b>             | highly-absorbent nylon-pile rubber alternating with brass-anodised aluminium scraper profile  |



suitable for indoor areas



Suitable for covered outdoor areas



Closed construction mat



High moisture absorption



For intensive foot traffic



Moderate dirt uptake



Production time within three working days after technically clarified order. Subject to change without notice.



Load carrying capacity up to 30kN

Subject to technical modifications

Kafloor Mats GmbH · Johannes-Gutenberg-Platz 1 · 06773 Gräfenhainichen  
· Telephone: +49 34953 31455 · Telefax: +49 34953 31459 · eingangsmatten@kafloor.de · www.kafloor.de

**KAFLOOR**